






CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

• DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments and used units.


- | | | | | | | | | | | | | | | | | | | | | | | |
|---|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------|----------|----------|--|---------|---------|---------|--|---------------------------|--------------------|---|----|
|  | 2SB1565 | DTA114EK | DTA123JK | DTA124EK | DTB123YK | DTC114EK | DTC114TK | DTC114YK | DTC124EK | DTC144EK | 2SA1362 | 28C2412K | 2SD2114K |  | 2SB1188 | 2SB1277 | 2SD1760 |  | NJM4966M-TE2
NJM4966MD | DAN202K
DAN202U |  | A1 |
|---|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------|----------|----------|--|---------|---------|---------|--|---------------------------|--------------------|---|----|

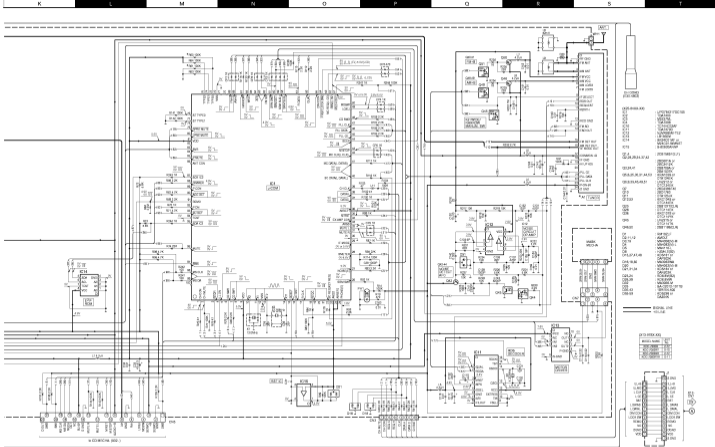

- TA78L05F DAP202K DA204 TC74HC02AF BR24C01AF M5237ML AN8806SB LB1930M TDA7479D
-

KDC-7080R/RV/RVY
KENWOOD

(K15-022X-00)

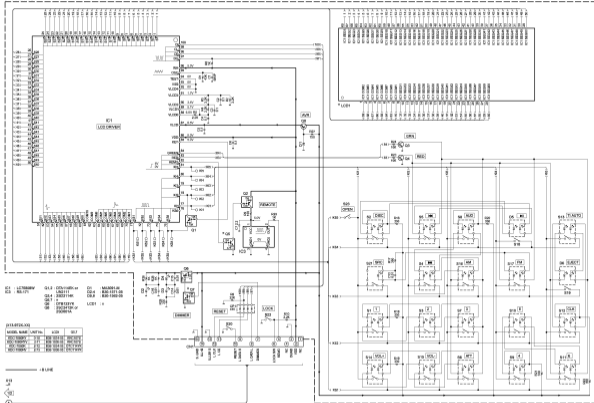

IC1	LM7805V	Q1,3	2N2222A	DI	M68010
IC2	M68010	Q2,4	2N2222A	DS4	820-1011-00
		Q5,6	2N2222A	DS5	820-1002-00
		Q7	2N2222A	LCY1	-

(K15-022X-00)

MODEL NAME / PART NO.	QTY	QTY
820-1001-00	2	820-1011-00
820-1002-00	2	820-1002-00
820-1003-00	2	820-1012-00
820-1004-00	2	820-1013-00

+5VDC




CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).
 Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (inspired parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.
 * DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments and units.

KDC-7080R/RV/
RV/RVY

KENWOOD

K20-4700-K1 (28M-136)

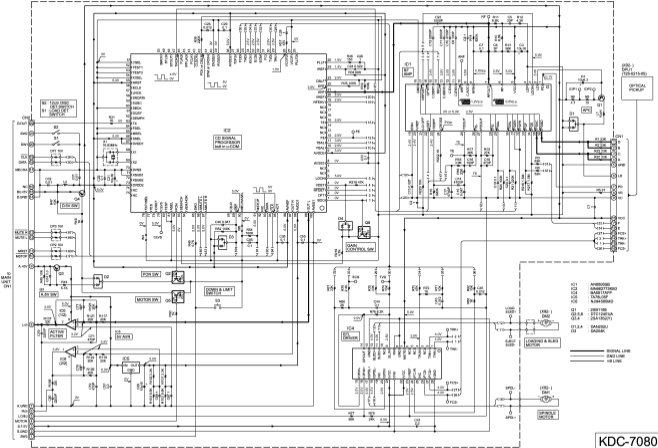

- IC1 : AN8050D
 - IC2 : AN8057TMSD
 - IC3 : BA817AMP
 - IC4 : TALKER
 - IC5 : N3M458MSD
 - Q1 : 2BT138
 - Q2, Q4 : 2SC2482A
 - Q3 : 2SA1502T1
 - OT1, 2 : 2AN25J1
 - Q3 : 2AN25K
- MOTOR SW : MOTOR SW
 MOTOR : MOTOR
 OPTICAL PICKUP : OPTICAL PICKUP
- SIGNAL LINE
 ——— DCG LINE
 ——— +5V LINE

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).
 △ Indicates safety critical components. To reduce the risk of electric shock, leakage current or resistance measurements shall be carried out (reposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

• DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments, or individual units.

KDC-7080R/RV/RVY
KENWOOD